
How To Appliqué

Iron the fusible webbing onto the wrong side of your appliqué fabric and allow to cool (A). Pull off the protective layer from the fusible webbing (B) and draw around your pattern piece onto the fusible-web backed fabric (C). Unless indicated otherwise, cut out the marked shape without seam allowance (D). Now place the fabric piece, fusible-web side down onto, the right side of the fabric it is to be appliquéd to and iron in place (E).



2. Iron you application on the fabric and let it cool. You can sew the figure on the fabric with a normal stitch or a Zigzag stitch. If you use a very narrow Zigzag stitch it will give a embroidery effect. Try the stitches first on a small piece of test fabric.

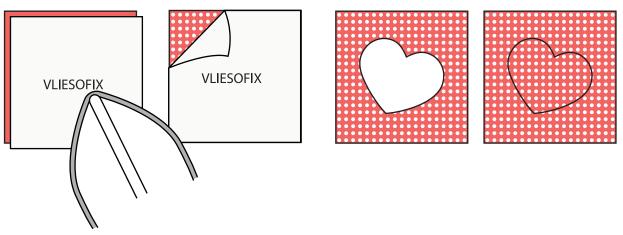

DIY FLUFFIES